BRUHAT BENGALURU MAHANAGARA PALIKE

YELAHANKA ZONE

NAME OF WORK : *IMPROVEMENTS TO ROADS AND MAIN AND CROSS ROADS OF KODIGEHALLI AND SURROUNDING AREAS IN WARD NO.08 KODIGEHALLI*

Job Code : 008-20-000070						Estimate Cost Rs.		60.00	Lakhs
Sl. No.	Description of Item	Unit	No.	L	B	D	Qty.	Rate	Amount
1	KSRB 2-2.1 : Earth work excavation by manual means for foundation of buildings, culverts water supply, sanitary line and electrical conduits either in pits or in trenches 1.5m and above in width, in ordinary soil not exceeding 1.5m, in depth including dressing the bottom and sides of pits and trenches, stacking the excavated soil clear from edges of excavation with lead upto 50m, after breaking of clods complete as per specifications, specification No, KBS 2.1 (a) / 2.3.5, Page No.5 & Item No.2.3)								
	for RCC Drain	Cum							
	1st Cross Road (Kote Layout)		2	55.00	1.00	1.00	110.00		
	2nd Cross Road (Kote Layout)		2	70.00	1.00	1.00	140.00		
	2nd Cross Road (W/S) Balaji Layout		2	75.00	1.00	1.10	165.00		
	3rd Cross Road (W/S) Balaji Layout		2	69.00	1.00	1.10	151.80		
	for Culverts		6	6.00	1.60	1.35	77.76		
					Total Qty		**644.56**	263.94	**170125.00**
	Basic Rate	249.00							
	Area Weightage @ 6%	14.94							
	Total	**263.94**							
2	KSRRB M100-1 Loading and Unloading of Stone Boulder / Stone aggregate /sand/kaner/ Moorum KSRRB M100-1 Placing tipper at loading point, loading with front end loader, dumping, turning for return trip, excluding time for haulage and return trip complete as per specifications MORTH -100/ Chapter 1 (Page No.136 & Item No 17.1)								
		Cum							
			Qty Vide Item No.1				**644.56**	95.40	**61491.02**
	Basic Rate for Haulage of materials as per Item No.17.4	2.00 t.k							
	Area Weightage of earth (1.28 tonne/km) for 15km (2.00X1.28X15.00)	38.40							
	Add loading and unloading Item No 17.1)	57.00							
	Total	95.40							
3	KSRB 4-1.3 : Providing and laying in position plain cement concrete of **Mix 1:4:8** with OPC @ 180kgs, with 40mm and down size graded granite metal coarse aggregates @0.85cum and fine aggregates @ 0.57cum machine mixed, machine mixed, concrete laid in layers not exceeding 15 cms. thick, well compacted, in foundation, including cost of all materials, labour, HOM curing complete as per specifications.Specification No. KBS 4.1, 4.2 (Page No.13 & Item No.4.3)								
	for RCC Drain	Cum							
	1st Cross Road (Kote Layout)		2	55.00	1.00	0.15	16.50		
	2nd Cross Road (Kote Layout)		2	70.00	1.00	0.15	21.00		
	2nd Cross Road (W/S) Balaji Layout		2	75.00	1.00	0.15	22.50		
	3rd Cross Road (W/S) Balaji Layout		2	69.00	1.00	0.15	20.70		
	for Culverts		6	6.00	1.60	0.15	8.64		
					Total Qty		**89.34**	5408.12	**483161.44**
	Basic Rate	5102.00							
	Area Weightage @ 6%	306.12							
	Total	**5408.12**							

Job Code : 008-20-000070				Estimate Cost Rs.				60.00	Lakhs
Sl. No.	Description of Item	Unit	No.	L	B	D	Qty.	Rate	Amount
4	KSRB 4.2.2 : Providing and laying in position reinforced cement concrete of Design Mix M20 with OPC @ 320kgs, with 20mm and down size graded granite metal coarse aggregates @0.69cum and fine aggregtes @ 0.460 cum, with super plasticisers @ 3 liters confirming to IS 9103-1999 reafirmed-2008, machine mixed, concrete laid in layers not exceeding 15 cms thick, vibrated for all works in foundation for footings, pedastals, retaining walls, return walls, walls (any thickness) including attached pilasters, columnspillars, posts, struts, buttresses, bed blocks, anchor blocks & plinths etc., including cost of all materials, labour, HOM curing, complete but excluding cost of reinforcement as per specifications. Specification No. KBS 4.1, 4.6 (Page.No.14 & Item No-4.11)									
	Raft	Cum							
	1st Cross Road (Kote Layout)		2	55.00	1.00	0.15	16.50		
	2nd Cross Road (Kote Layout)		2	70.00	1.00	0.15	21.00		
	2nd Cross Road (W/S) Balaji Layout		2	75.00	1.00	0.15	22.50		
	3rd Cross Road (W/S) Balaji Layout		2	69.00	1.00	0.15	20.70		
	for Culverts		6	6.00	1.60	0.15	8.64		
	side wall		4	55.00	0.15	0.60	19.80		
			4	70.00	0.15	0.60	25.20		
			4	75.00	0.15	0.75	33.75		
			4	69.00	0.15	0.75	31.05		
			12	6.00	0.30	0.90	19.44		
					Total Qty		**218.58**	5998.54	**1311160.87**
	Basic Rate	5659.00							
	Area Weightage @ 6%	339.54							
	Total	**5998.54**							
5	KSRB 4-6.4 : Providing and removing **centering,** shuttering, strutting, propping etc., and removal of form work for vertical surface such as walls at any thickness, including attached pilasters, buttresses, plinth and string courses cost of all materials, labour complete as per specifications. Specification No. KBS 4.6.21 (Page.No.16 & Item No-4.31)								
	side wall	Sqm							
	1st Cross Road (Kote Layout)		8	55.00		0.60	264.00		
	2nd Cross Road (Kote Layout)		8	70.00		0.60	336.00		
	2nd Cross Road (W/S) Balaji Layout		8	75.00		0.75	450.00		
	3rd Cross Road (W/S) Balaji Layout		8	69.00		0.75	414.00		
	for Culverts		24	6.00		0.90	129.60		
							1593.60	379.48	**604739.33**
	Basic Rate	358.00							
	Area Weightage @ 6%	21.48							
	Total	**379.48**							
6	KSRB 4.9.2:Providing **T.M.T steel** reinforcement for R.C.C work including straightening, cutting, bending, hooking, placing in position, lapping and / or welding wherever required, tying with binding wire and anchoring to the adjoining members wherever necessary complete as per design (laps, hooks and wastage shall not be measured and paid) cost pf materials, labour, HOM of machinery complete as per specifications.Specification No. KBS 4.6.3-do-TMT Bars Fe 500 (Page No.18 & Item No.4.46.2)								
		tonne							
		60% of Qty Vide Item No.4 in Qtl					131.15		
					in tonne		**13.11**	75223.96	**986547.19**
	Basic Rate	70966.00							
	Area Weightage @ 6%	4257.96							
	Total	**75223.96**							
7	Supply and fixing Precast reinforced concrete slab 10cm thick including cost of reinforcement as per design and drawing, material cost, transportation, hire charges of machinery, machine cutting the vertical face to get plain even surface etc., complete with all leads and lift conveynce charges, labour charges inclusive of cost of all materials.								

Job Code : 008-20-000070				Estimate Cost Rs.				60.00	Lakhs
Sl. No.	Description of Item	Unit	No.	L	B	D	Qty.	Rate	Amount
	Covering Slabs to Drains	Cum							
	1st Cross Road (Kote Layout)		2	55.00	0.90		99.00		
	2nd Cross Road (Kote Layout)		2	70.00	0.90		126.00		
	2nd Cross Road (W/S) Balaji Layout		2	75.00	0.90		135.00		
	3rd Cross Road (W/S) Balaji Layout		2	69.00	0.90		124.20		
					Total Qty		**484.20**	1922.00	**930632.00**
	(Excluding GST) Approved Data Rate	1922.00							
8	Supply and fixing Precast reinforced concrete slab 23cm thick including cost of reinforcement as per design and drawing, material cost, transportation, hire charges of machinery, machine cutting the vertical face to get plain even surface etc., complete with all leads and lift conveynce charges, labour charges inclusive of cost of all materials.								
	Covering Slabs	Cum							
	for Culverts		6	6.00	1.50		54.00		
					Total Qty		**54.00**	4886.00	**263844.00**
	(Excluding GST) Approved Data Rate	4886.00							
9	Providing and fixing pre cast solid cement concrete kerb stones made out of C.C. 1:2:4 with top and bottom width 114 and 165 mm respectively, 400mm high and 450mm in length finished with CM 1:3 plastering and finishing cutting, including form work, curing, including cost of all materials, labour, hire charges of machinery, loading, unloading, lead and lift, transportation etc., complete. (Page No.27 & Item No. 5.30)								
	Balaji Layout	No's							
	1st Cross Road (Kote Layout)		2	55.00	/ 0.45		244.44		
	2nd Cross Road (Kote Layout)		2	70.00	/ 0.45		311.11		
	2nd Cross Road (W/S) Balaji Layout		2	75.00	/ 0.45		333.33		
	3rd Cross Road (W/S) Balaji Layout		2	69.00	/ 0.45		306.67		
					Total Qty		**1195.56**		
					Say		**1190.00**	432.48	**514651.00**
	Basic Rate	408.00							
	Area Weightage @ 6 %	24.48							
	Total	**432.48**							
10	KSRB 15-19.2 :Providing and applying **ready mix priming coat** over concrete/masonry/asbestos cement sheet/plastered surfaces including preparing the surface after throughly cleaning of oil,grease,dirt and other foreign matter and sand papering including cost of materials, labour, complete as per specifications. (Page No.124 & Item No.15.80)								
	Balaji Layout	Sqm							
	1st Cross Road (Kote Layout)		2	55.00		0.40	44.00		
	2nd Cross Road (Kote Layout)		2	70.00		0.40	56.00		
	2nd Cross Road (W/S) Balaji Layout		2	75.00		0.40	60.00		
	3rd Cross Road (W/S) Balaji Layout		2	69.00		0.40	55.20		
					Total Qty		**215.20**	39.22	**8440.00**
	Basic Rate	37.00							
	Area Weightage @ 6 %	2.22							
	Total	**39.22**							
11	KSRB 800-1.Painting two coats after filling the surface with synthetic enamel paint in approved shades on new plastered concrete surfaces, with materials, labour complete as per specifications. (Page No.180 & Item No.24.1)								
	Balaji Layout	Sqm							
	1st Cross Road (Kote Layout)		2	55.00		0.40	44.00		
	2nd Cross Road (Kote Layout)		2	70.00		0.40	56.00		

Job Code : 008-20-000070				Estimate Cost Rs.				60.00	Lakhs
Sl. No.	Description of Item	Unit	No.	L	B	D	Qty.	Rate	Amount
	2nd Cross Road (W/S) Balaji Layout		2	75.00		0.40	60.00		
	3rd Cross Road (W/S) Balaji Layout		2	69.00		0.40	55.20		
					Total Qty		215.20	84.80	18249.00
	Basic Rate	80.00							
	Area Weightage @ 6 %	4.80							
	Total	84.80							
	Sub-Total for CSR 2018-19								5353041.00
	12% for Applicable GST on CSR 2018-19								642365.00
	Miscellaneous and unforeseen charges								4594.00
	Grand Total Amount Rs.								6000000.00
	(Rupees Sixty Lakhs Only)								

CERTIFICATE

1) The site has been inspected and the work is found to be necessary.
2) The rates adopted are as per PW,P IWTD SR of 2018-19 and Approved Data Rate of Bangalore Circle.
3) The provisions were made in this estimate are necessary and adequate.
4) The area comes under the Bruhat Bengaluru Mahanagara Palike Limits.
5) This work is not repeated in any other programs or Grants
6) This work is Under Budget Head P-3726 Zonal Public Works

Assistant Engineer
Ward No.08
Kodigehalli

Assistant Executive Engineer
Kodigehalli Sub-Division
B.B.M.P

Executive Engineer
BYATARAYANAPURA - DIVISION
B.B.M.P

ADMINISTRATIVE APPROVAL
Accorded For Rs. 60.00 Lakhs
Head of A/c. P3726
Div. Ref. No. 06/20-21 Date 19-5-2020
AE EE(BTP)

Technical Sanction
Accorded For Rs 60.00 Lakhs only
Head of A/C. P3726
CER NO : 02 Dt: 22.05.2020
TA CE (YNK)

NAME OF WORK : IMPROVEMENTS TO ROADS AND ROADS IN MAIN AND CROSS ROADS OF KODIGEHALLI AND SURROUNDING AREAS IN WARD NO.08 KODIGEHALLI

ESTIMATE COST : Rs.60.00 LAKHS

JOB NUMBER : 008-20-000070

KEY : NOT TO SCALE

N

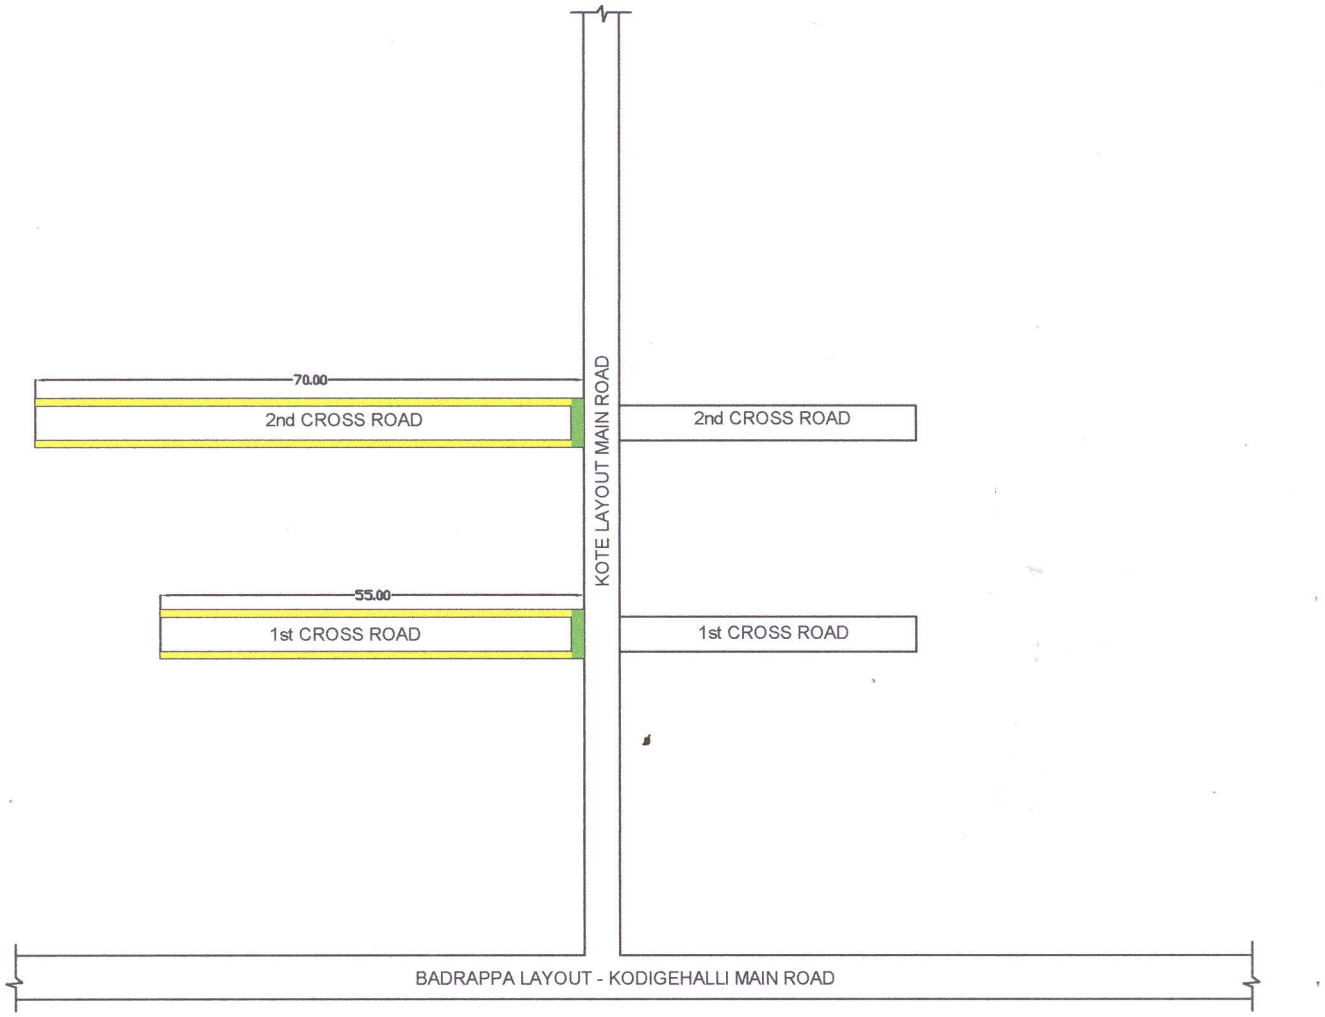

Assistant Engineer
Ward No.08
Kodigehalli

Assistant Executive Engineer
Kodigehalli Sub-Division
B.B.M.P

INDEX

RCC DRAIN

NAME OF WORK : IMPROVEMENTS TO ROADS AND ROADS IN MAIN AND CROSS ROADS OF KODIGEHALLI AND SURROUNDING AREAS IN WARD NO.08 KODIGEHALLI

ESTIMATE COST : Rs.60.00 LAKHS

JOB NUMBER : 008-20-000070

KEY : NOT TO SCALE

N

Assistant Engineer
Ward No.08
Kodigehalli

Assistant Executive Engineer
Kodigehalli Sub-Division
B.B.M.P

INDEX

- RCC DRAIN
- RCC CULVERT